

EMERGENCY EXIT SIGNS

ARROW P

MATERIALS:

White, grey or black polycarbonate body
Plexi glass

MOUNTING:

Recessed (ceiling)

POWER SUPPLY:

Self contained – 220 - 240VAC/50 - 60Hz
Central battery – 220 - 240VAC/50 - 60Hz; 176 - 275VDC
Central battery FZLV – 24VDC

LIGHT SOURCE:

1W, 2W LED

CHARGING:

BASIC: max. 24h
STANDARD: max. 24h
PREMIUM: max. 12h; energy-saving electronic charger

AUTONOMY AND BATTERIES:

BASIC: 1h or 3h, Ni-Cd 3,6V batteries
STANDARD: 1h or 3h, Ni-Cd 3,6V batteries
PREMIUM: 1h or 3h, LiFePO₄ 6,4V batteries

INSULATION CLASS:

II or III

IP RATING:

IP41

VIEWING DISTANCE:

25m

AMBIENT TEMPERATURE:

t_a: 0°C - +40°C

OPTIONS:



SE – non maintained
SA – maintained
AT – autotest
PT – manual test button
RU – Rubic UNA central monitoring
FZLV – central battery FZLV 24VDC
CB – central battery

ADDITIONAL INFORMATION:

LED indicator signalizes mains power supply and battery charge
Deep discharge protection
III class of insulation of FZLV version



DIMENSIONS (mm):

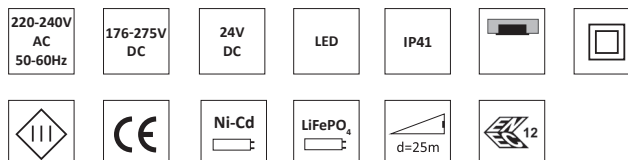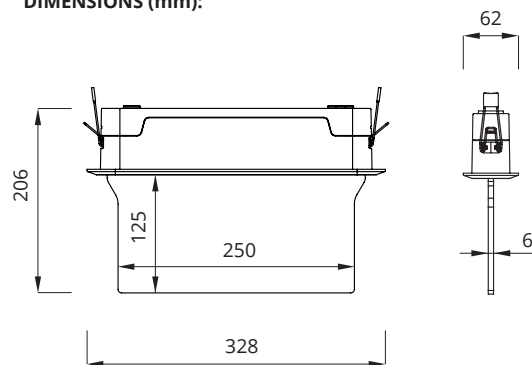

*see pictogram



KM 618355
BS-EN60592-2-22

*Emergency exit sign fixtures do not include any pictogram in the set. Pictograms have to be chosen and ordered as a separate item
**current list of products with Kitemark and ENEC is available at www.awex.eu

EMERGENCY EXIT SIGNS

SELF-CONTAINED CONFIGURATION:

CODE	POWER	MODULE	AUTONOMY [h]		MODE	OPTIONS			COLOR		
BASIC											
ARP	1W	E	1	3	SE	PT	X	WH	GR	BL	
STANDARD											
ARP	1W	C	1	3	SA	PT	X	WH	GR	BL	
ARP	2W	C	1	3	SA	PT	X	WH	GR	BL	
PREMIUM											
ARP	1W	B	1	3	SA	AT	RU	WH	GR	BL	
ARP	2W	B	1	3	SA	AT	RU	WH	GR	BL	

CENTRAL BATTERY CONFIGURATION - NON-ADDRESSABLE

CODE	POWER	MODULE	SYSTEM	OPTIONS			COLOR		
ARP	1W	F	CB	CBS	X	WH	GR	BL	
ARP	2W	F	CB	CBS	X	WH	GR	BL	

CENTRAL BATTERY CONFIGURATION - ADDRESSABLE:

CODE	POWER	MODULE	SYSTEM	OPTIONS		COLOR		
ARP	1W	Z	CB	ADE	ADP	WH	GR	BL
ARP	2W	Z	CB	ADE	ADP	WH	GR	BL

FZLV SYSTEM CONFIGURATION:

CODE	POWER	SYSTEM	COLOR		
ARP	1W	FZLV	WH	GR	BL
ARP	2W	FZLV	WH	GR	BL

LEGEND:

ARP - fixture ARROW P

E - electronic gear for BASIC self-contained fittings

C - electronic gear for STANDARD self-contained fittings

B - electronic gear for PREMIUM self-contained fittings

F - electronic gear for central battery fittings

Z - electronic gear for addressable central battery fittings

SE - non-maintained

SA - maintained (with an option of connecting as non-maintained)

PT - manual test button

X - fitting without additional options

AT - autotest

RU - RUBIC UNA central monitoring system

CB - central battery version

CBS - central battery for circuit monitoring

ADE - central battery with ADE address module

ADP - central battery with ADP address module - SMART technology

FZLV - central battery FZLV 24 VDC

WH - white color

GR - grey color

BL - black color