

## EMERGENCY EXIT SIGNS

### ARROW N

**MATERIALS:**

White, grey or black polycarbonate body  
Plexi glass

**MOUNTING:**

Surface (wall, ceiling)  
Optionally mounting on a rope sling (ceiling\*)

**POWER SUPPLY:**

Self contained – 220 - 240VAC/50 - 60Hz  
Central battery – 220 - 240VAC/50 - 60Hz; 176 - 275VDC  
Central battery FZLV – 24VDC

**LIGHT SOURCE:**

1W, 2W LED

**CHARGING:**

BASIC: max. 24h  
STANDARD: max. 24h  
PREMIUM: max. 12h; energy-saving electronic charger

**AUTONOMY AND BATTERIES:**

BASIC: 1h or 3h, Ni-Cd 3,6V batteries  
STANDARD: 1h or 3h, Ni-Cd 3,6V batteries  
PREMIUM: 1h or 3h, LiFePO<sub>4</sub> 6,4V batteries

**INSULATION CLASS:**

II or III

**IP RATING:**

IP40

**VIEWING DISTANCE:**

25m

**AMBIENT TEMPERATURE:**

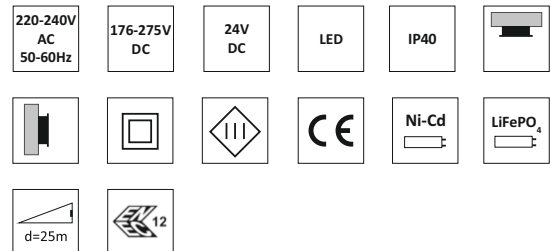
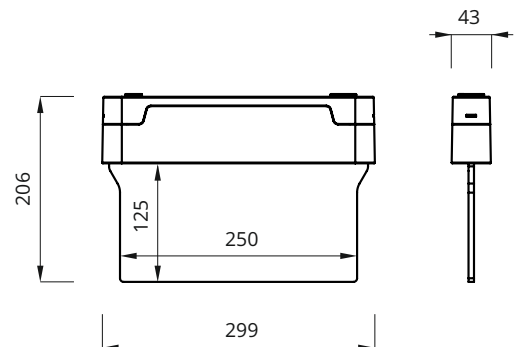
Self-contained:  
t<sub>a</sub>: 0°C ÷ 40°C  
CB:  
t<sub>a</sub>: 0°C ÷ 50°C

**OPTIONS:**

SE – non maintained  
SA – maintained (with an option of connecting as non-maintained)  
AT – autotest  
PT – manual test button  
RU – Rubic UNA central monitoring  
FZLV – central battery FZLV 24VDC  
CB – central battery

**ADDITIONAL INFORMATION:**

LED indicator signalizes mains power supply and battery charge  
Deep discharge protection  
III class of insulation of FZLV version  
\*requires an accessory for mounting on a rope sling


**DIMENSIONS (mm):**


\*pictogram



KM 618355  
BS-EN 60598-2-22

\*1pc. of universal pictogram is included in each single box  
Current list of products with Kitemark and ENEC is available at [www.awex.eu](http://www.awex.eu)

## EMERGENCY EXIT SIGNS

### SELF-CONTAINED CONFIGURATION

BASIC										
CODE	POWER	MODULE	AUTONOMY [h]		MODE	OPTIONS		COLOR		
ARN	1W	E	1	3	SE	PT	X	WH	GR	BL
STANDARD										
ARN	1W	C	1	3	SA	PT	X	WH	GR	BL
	2W	C	1	3	SA	PT	X	WH	GR	BL
PREMIUM										
ARN	1W	B	1	3	SA	AT	RU	WH	GR	BL
	2W	B	1	3	SA	AT	RU	WH	GR	BL

### CENTRAL BATTERY CONFIGURATION - NON-ADDRESSABLE

CODE	POWER	MODULE	SYSTEM	OPTIONS		COLOR		
ARN	1W	F	CB	CBS	X	WH	GR	BL
	2W	F	CB	CBS	X	WH	GR	BL

### CENTRAL BATTERY CONFIGURATION - ADDRESSABLE

CODE	POWER	MODULE	SYSTEM	OPTIONS		COLOR		
ARN	1W	Z	CB	ADE	ADP	WH	GR	BL
	2W	Z	CB	ADE	ADP	WH	GR	BL

### FZLV SYSTEM CONFIGURATION

CODE	POWER	SYSTEM	COLOR		
ARN	1W	FZLV	WH	GR	BL
	2W	FZLV	WH	GR	BL

### LEGEND:

ARN – fixture ARROW N

E – electronic gear for BASIC self-contained fittings

C – electronic gear for STANDARD self-contained fittings

B – electronic gear for PREMIUM self-contained fittings

F – electronic gear for central battery fittings

Z – electronic gear for addressable central battery fittings

SE – non-maintained

SA – maintained (with an option of connecting as non-maintained)

PT – manual test button

X – fitting without additional options

AT – autotest

RU – RUBIC UNA central monitoring

CB – central battery version

CBS – central battery for circuit monitoring

ADE – central battery with ADE address module

ADP – central battery with ADP address module – SMART technology

FZLV – central battery FZLV 24 VDC

WH – white color

GR – grey color

BL – black color