



Cubic Kinkiet IP65 LED



LED bracket with subtle design for illumination of covered facades and representative rooms. Possibility of painting in any RAL colour.

Materials: Electrostatically painted aluminium profile (standard colour: anthracite), diffuser made of transparent tempered glass

Installation: Wall mounted

Power: 230 V

ELECTRICAL DATA

Light source	LED
Type of equipment	AC
Voltage rating	220 ... 240 V
Light source included	Yes
SELV	No

MECHANICAL DATA

Type of installation	Wall mounted
Housing material	Aluminum
Electrical track connection	No

INFORMATION

Colour	Anthracite
Operating temperature range	-20 ... 40 °C

CERTIFICATES

Degree of protection (IP)	IP65
Class of protection	I
Light source protection	Yes
Energy class	A+
CE	Yes
EAC	Yes

LIGHT DATA

Light colour	White
Color rendering index	80
Class of luminaire	I
Light output degradation	B10
Lumen maintenance	L90
Lifetime	> 60000 h
MacAdam	SDCM 3
Lamp Lumen Maintenance Factor (after 60 000h)	91 %

OPTICAL DATA

Louver/ shutter	SH
Diffuser material	Transparent glass
Reflector	High gloss


AVAILABLE VARIANTS

Product code	Luminaire power [W]	Luminaire luminous flux [lm]	Luminaire's luminous efficacy [lm/W]	Light distribution	Beam angle [°]	Colour temperature	Info
PX4111601	10	1100	110	DI	50	3000K	-
PX4111608	10	1130	113	DI	50	4000K	-
PX4111615	15	1580	105	DI	50	3000K	-
PX4111622	15	1630	109	DI	50	4000K	-
PX4111629	26	2860	110	DI	50	3000K	-
PX4111636	26	2940	113	DI	50	4000K	-

AVAILABLE VARIANTS

Product code	Luminaire power [W]	Luminaire luminous flux [lm]	Luminaire's luminous efficacy [lm/W]	Light distribution	Beam angle [°]	Colour temperature	Info
PX4111643	15	1800	120	DI/IN	70 15	3000K	DI-890lm / IN-910lm
PX4111650	15	1850	123	DI/IN	70 15	4000K	DI-920lm / IN-930lm
PX4111671	15	1820	121	DI/IN	15 15	3000K	DI-910lm / IN-910lm
PX4111678	15	1860	124	DI/IN	15 15	4000K	DI-930lm / IN-930lm
PX4111657	20	2200	110	DI/IN	50 50	3000K	DI-1100lm / IN-1100lm
PX4111664	20	2260	113	DI/IN	50 50	4000K	DI-1130lm / IN-1130lm

DIMENSIONS

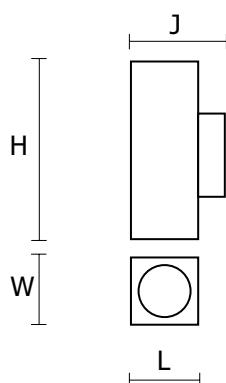

L [mm]	W [mm]	H [mm]	Additional dimension [mm]
85	85	232	118

L = Length | W = Width | H = Height / Depth