

EXIT L



AC
220-240V
50/60Hz

DC
176-275V

DC
48V

LED

IP65

IK08



d=30mm



Ni-Cd

LiFePO₄



KM 618355
BS-EN 60598-2-22



MATERIALS

White, grey or black polycarbonate body • Transparent or opal polycarbonate cover • Plexi glass

MOUNTING

Surface • Optionally recessed⁽¹⁾ • Optionally pendant⁽²⁾

POWER SUPPLY

Self contained – 220 - 240VAC - 50/60Hz
Central battery – 220 - 240VAC - 50/60Hz; 176 - 275VDC
Central battery FZLV II – 48VDC

LIGHT SOURCE

1W, 2W LED
Colour temperature: 6000K
Lifetime: 50000h

CHARGING

Standard: max. 24h
Premium: max. 12h; energy-saving electronic charger

AUTONOMY AND BATTERIES

Standard: 1h or 3h, Ni-Cd 3,6V batteries
Premium: 1h or 3h, LiFePO₄ 6,4V batteries

INSULATION CLASS

II or III

IP & IK RATING

IP65, IK08

VIEWING DISTANCE

30 m

VIEWING METHOD

Single sided or double-sided⁽³⁾

AMBIENT TEMPERATURE

Self-contained: t_a: 0°C ÷ 40°C • t_a: -25°C ÷ 40°C – together with heater for low temperatures
Central battery: t_a: 0°C ÷ 50°C


OPTIONS

SE – non maintained • SA – maintained • AT – autotest • PT – manual test button
• RU – Rubic UNA central monitoring • RW – Rubic UNA Wireless central monitoring
• RD – DALI central monitoring • FZLV2 – central battery FZLV II 48VDC • CB – central battery

ADDITIONAL INFORMATION

LED indicator signalizes mains power supply and battery charge • Deep discharge protection
• Optional adaptation of the fixture for low temperatures up to -25°C with HTR 25
• III class of insulation of FZLV2 version • ⁽¹⁾ see accessory for recessed mounting
• ⁽²⁾ see accessory for recessed mounting, RW option not available • ⁽³⁾ see accessory for two-sided pictogram • ⁽⁴⁾ 1pc of universal pictogram is included in each single box

DIMENSIONS [mm]

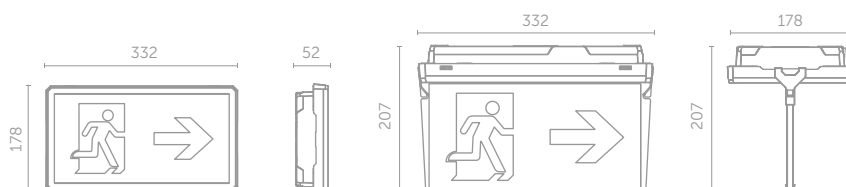

⁽⁴⁾ pictogram

SELF-CONTAINED CONFIGURATION

	CODE	POWER	MODULE	AUTONOMY [h]		MODE		OPTIONS			COLOR			COVER		
				1	3	SE	SA	PT	AT	X	WH	GR	BL	TR	OP	
STANDARD	ETL	1W	E C	1	3	SE	SA	PT	AT	X	WH	GR	BL	TR	OP	
		2W	E C	1	3	SE	SA	PT	AT	X	WH	GR	BL	TR	OP	
PREMIUM	ETL	1W	B	1	3	SE	SA	AT	RU	RW	RD	WH	GR	BL	TR	OP
		2W	B	1	3	SE	SA	AT	RU	RW	RD	WH	GR	BL	TR	OP

CENTRAL BATTERY CONFIGURATION - NON-ADDRESSABLE

CODE	POWER	MODULE	SYSTEM	OPTIONS	COLOR	COVER
ETL	1W	F	CB	CBS X	WH GR BL	TR OP
	2W	F	CB	CBS X	WH GR BL	TR OP

CENTRAL BATTERY CONFIGURATION – ADDRESSABLE

CODE	POWER	MODULE	SYSTEM	OPTIONS	COLOR	COVER
ETL	1W	Z	CB	ADE	WH GR BL	TR OP
	2W	Z	CB	ADE	WH GR BL	TR OP

FZLV SYSTEM CONFIGURATION

CODE	POWER	SYSTEM	COLOR	COVER
ETL	1W	FZLV2	WH GR BL	TR OP
	2W	FZLV2	WH GR BL	TR OP

LEGEND:

- ETL fixture EXIT L
- E, C electronic gear for STANDARD self-contained fittings
- B electronic gear for PREMIUM self-contained fittings
- F electronic gear for central battery fittings
- Z electronic gear for addressable central battery fittings
- SE non maintained
- SA maintained
- PT manual test button
- X fitting without additional options
- AT autotest
- RU Rubic UNA central monitoring
- RW Rubic UNA Wireless central monitoring
- RD DALI central monitoring
- FZLV2 central battery FZLV II 48 VDC
- CB central battery version
- CBS central battery for circuit monitoring
- ADE address module for CBS 2.0 – SMART technology
- WH white color
- GR grey color
- BL black color
- TR transparent polycarbonate cover
- OP opal polycarbonate cover

